


INDUSTRIAL SEWING MACHINE for joining heavy and wide fabrics QMZ-101RFU/QMZ-101RF




■ Z Shaped Arm

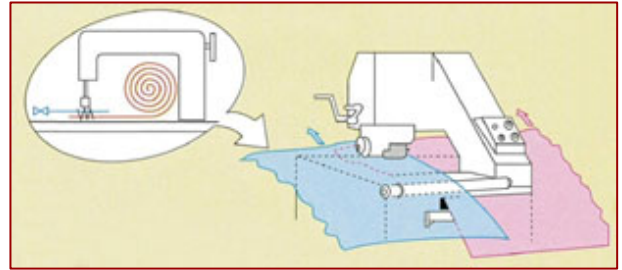

This structure makes it possible to joining multiple wide fabrics.

■ Stitch & Needle position


6 Needles, Double-Chain-Stitch

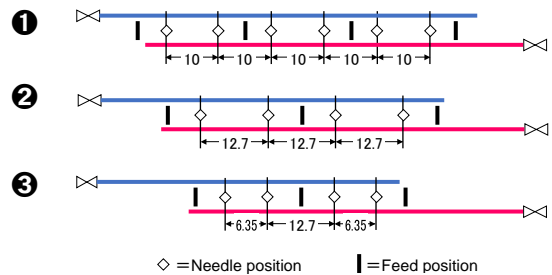

Specifications

Model	QMZ-101RFU	QMZ-101RF
Description	6 Needles, Top & Bottom Feed, Double-Chain-Stitch	
Input Power	AC 3P 200-220V ±10% 50/60Hz	
Power Consumption	Approx. 3.2 kVA	Approx. 2.3 kVA
Sewing Speed	200-800 SPM Inverter-control	200-1000 SPM Inverter-control
Feed Mechanism	Top & Bottom Feed & Pull Roller	
Bed Height	780 mm	
Distance from the center to machine arm	Left 120 mm / Right 120 mm	
Needle Gauge	Max. 60 mm (Gauge w :10 mm X 6 needles)	
Stitch Length	6 - 10 mm	
Needle-Bar Stroke	45 mm	
Presser Height	Max. 20 mm	
Needle & Looper	Max. 6 pcs.	
Thread Stand	Upper 6 pcs. / Lower 6 pcs.	
Needle No.	DR x 2 #25	
Needle Stop Position	Needle goes up automatically as machine stops	
Pull Roller	Lower Roller Drive	
Operation Mode	Auto - Manual - Inching	
Drive Motor	3φ 1.5 KW / 4P (Inverter control)	3φ 0.75 KW / 4P (Inverter control)
Start Up	Button - Switch	
Dimension (WxDxH)	Approx. 700 x 650 x 1815 mm	Approx. 700 x 650 x 1610 mm
Net Weight	Approx. 350 kg	Approx. 350 kg

Thread spool size



Thread thickness:
approx. 3,333dtex
(approx.3,000 denier)